

SPECIFICATION

Quality		: ATLANTIC
Product definition		: tufted cut pile, frisee
Gauge		: 1/10"
No. of tufts	ISO 1763	: ± 178000/m ²
Pile fibre		: 100% polyamide nylon ECONYL
Pile weight		: 1.100 gr/m ² ± 5%
Pile height	ISO 1766	: 5.5 mm ± 5%
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex
Total thickness	ISO 1765	: 8.5 mm ± 5%
Total weight		: 4800 gr/m ² ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20

PERFORMANCE

Use classification	EN 1307	: Class 33
Castor chair test	EN 985	: A. continuous use
Abrasion	EN 1963	: pass
Vettermann test	ISO TR 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: 0.07 m ² K/W
Dimensional stability	EN 986 - EN 1307	: pass


ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: -2.0 kV
Horizontal electrical resistance	ISO 10965	: 7.9x10 ¹² Ω
Vertical electrical resistance	ISO 10965	: 4.8x10 ¹¹ Ω
Static loading		: anti-static

FLAME PROPERTIES

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: B _{fl} -s1
Hot metal nut test	BS 4790	: Low Radius

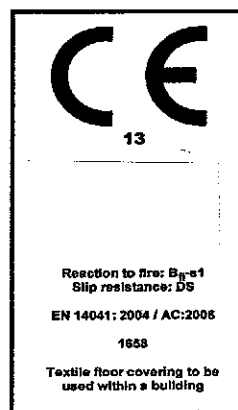

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: 4-5
Rubbing, dry	ISO 105 X12	: 5.0
Rubbing, wet	ISO 105 X12	: 5.0
Water	ISO 105 E01	: 4-5
Water stains	EN 1307/EN 15115	: 5.0

GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

70	115
289	93
74	

75	410
76	Polyflex Backing
77	

