

SPECIFICATION

| | | |
|--------------------|----------|---------------------------------|
| Quality | | : COBRA / COBRA LINES |
| Product definition | | : tufted loop pile |
| Gauge | | : 1/10" |
| No. of tufts | ISO 1763 | : ± 164000/m ² |
| Pile fibre | | : 100% Solution Dyed Nylon |
| Pile weight | ISO 8543 | : 550 gr/m ² ± 5% |
| Pile height | ISO 1766 | : 2.6 mm ± 5% |
| Primary backing | | : PA/PES non-woven - Colback |
| Tile backing | | : Polyflex |
| Total thickness | ISO 1765 | : 5.9 mm ± 5% |
| Total weight | ISO 8543 | : 4260 gr/m ² ± 7,5% |
| Tile size | | : 50 x 50 cm (± 19.7" x 19.7") |
| Tiles per box | | : 20 |

PERFORMANCE

| | | |
|-----------------------|-------------------|---------------------------|
| Use classification | method en 1307 | : 33 |
| Castor chair test | EN 985 | : A, continuous use |
| Abrasion | ISO 12951 | : pass |
| Vettermann test | ISO 10361/EN 1471 | : pass |
| Thermal isolation | ISO 8302 | : 0.08 m ² K/W |
| Dimensional stability | EN 986 | : pass |
| Luxery/Comfort | EN 1307 | : classe 1 |
| Sound Absorption | ISO 140-8 | : 24 dB |

ELECTROSTATIC PROPERTIES


| | | |
|----------------------------------|--------------|------------------------|
| Walk on test | ISO 6356 | : -0.1 kV |
| Horizontal electrical resistance | ISO CD 10965 | : 3x10 ⁸ Ω |
| Vertical electrical resistance | ISO CD 10965 | : 4x10 ¹⁰ Ω |
| Static loading | | : anti-static |

FLAME PROPERTIES

| | | |
|--------------------|----------------|----------------------|
| Reaction to fire | EN ISO 11925-2 | |
| | EN ISO 9239-1 | : B _n -s1 |
| Hot metal nut test | BS 4790 | : Low Radius |

COLOUR FASTNESS PROPERTIES

| | | |
|--------------|-------------|-------|
| Light | ISO 105 B02 | : > 5 |
| Rubbing, dry | ISO 105 X12 | : 5.0 |
| Rubbing, wet | ISO 105 X12 | : 5.0 |
| Shampoo | BS 1006 | : 5.0 |
| Water | ISO 105 E01 | : 4.5 |
| Water stains | TNO W 6024 | : 5.0 |

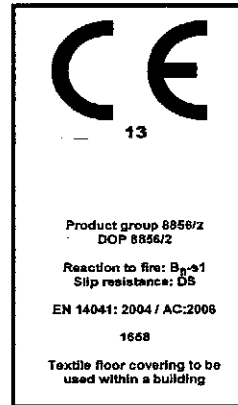

GENERAL

Recommended maintenance: Best results are obtained when cleaned with a dry shampoo method.
Pile direction: Directional arrows are printed on the back of each tile.
Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

| | | |
|-------------------------|----------------------|-----------------------|
| 5640 Grey / Black | 5542 Dark Grey | 5645 Light Grey |
| | 5551 Black | 5650 Black |

| | |
|--------------|--------------|
| 5661 Blue | 5560 Blue |
|--------------|--------------|

| | | |
|------------------------|---------------|--------------------------|
| 5522 Pearl | 5820 Beige | 5509 Special Camel |
| 5576 Light Green | 5520 Camel | 5609 Special Camel |

| | |
|-------------|----------------------------------|
| 5580 Red | 5642 Special Grey / Red |
|-------------|----------------------------------|

| | | |
|--------------------|-----------------------|------------------|
| 5540 Light Grey | 5561 Light Blue | 5660 BlueBlue |
| 5550 Antracite | 5562 Royal Blue | |

| | | |
|------------------------|-----------------------|---------------------|
| 5870 Apple Green | 5531 Brown | Polyflex Backing |
| 5570 Green | 5532 Dark Brown | Felt Backing |